


MAN 4163158
Rev. A 9-2007

970355
3 BAG
DUMP FROM SEAT

PARTS MANUAL


3 Bag Dump from Seat

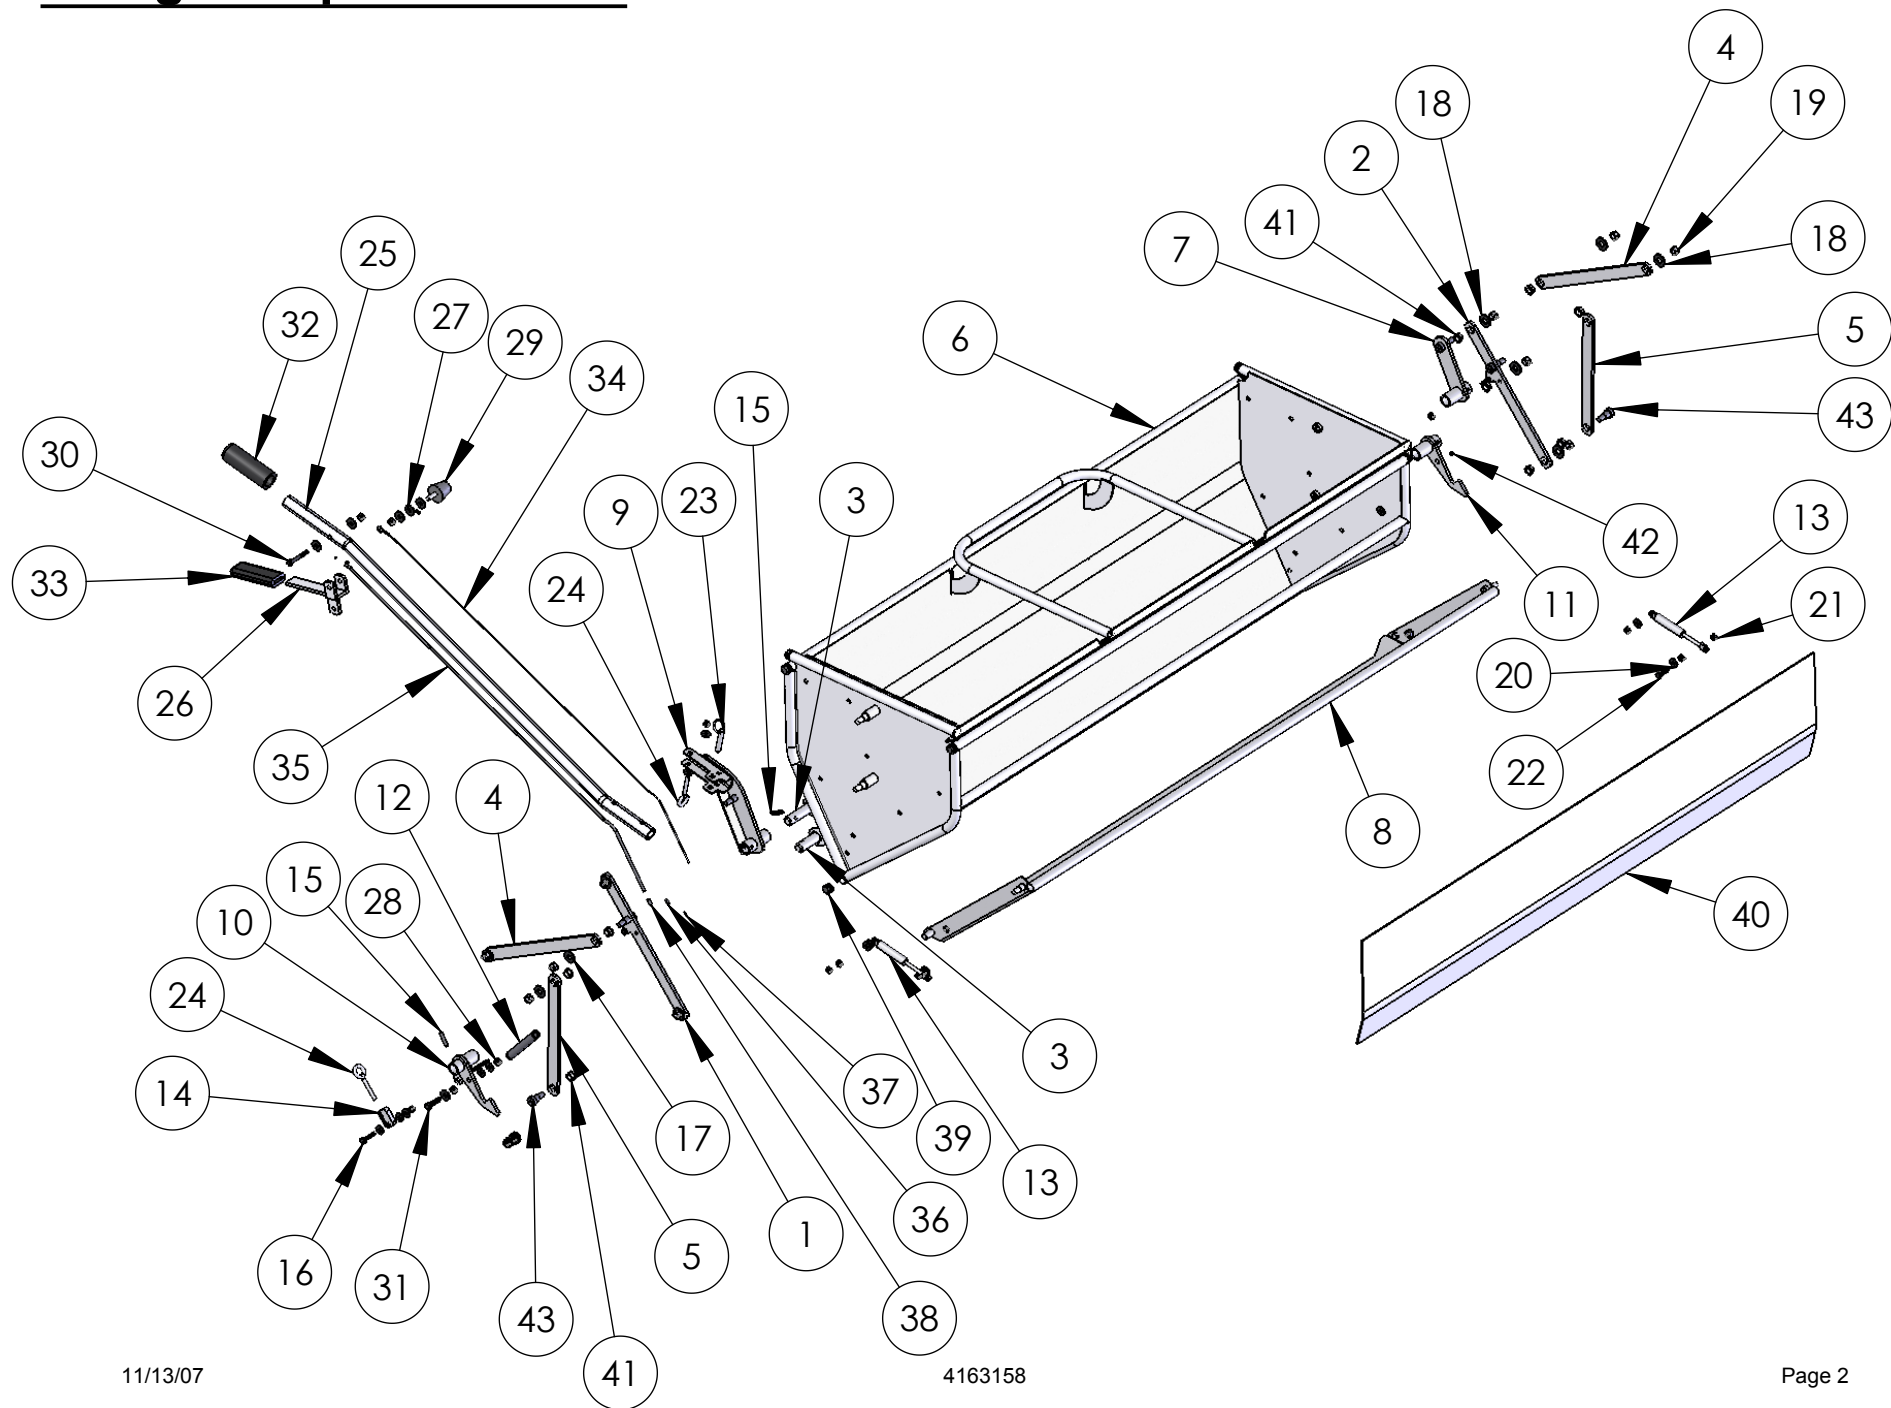

3 Bag Dump from Seat Parts List

Index #	Description	Qty	CGC P/N
1	MASTER LINK W/A (LH)	1	4163101
2	MASTER LINK W/A (RH)	1	4163102
3	TORQUE ROD	2	4163103
4	DRIVE LINK	2	4163104
5	SLAVE LINK	2	4163105
6	DUMP FRAME	1	4163106
7	TORQUE LINK ASSEMBLY	1	4163107
8	GATE ASSEMBLY	1	4163108
9	HANDLE PIVOT	1	4163109
10	LATCH ASSEMBLY LH	1	4163110
11	LATCH ASSEMBLY RH	1	4163111
12	TENSION SPRING	1	4163112
13	Gas Spring, 144.5mm w/ 40mm Extend Length	2	4163113
14	Cable Adjustment Block	1	4163114
15	Spring Pin, 1/4" x 1 1/4"	3	64061-25
16	1/4-20 X 1 1/4 G5	3	64123-80
17	3/8 Washer SAE	5	64163-04
18	1/2" Flat Washer	5	64163-19
19	3/8-16 Nylon Insert Nut	10	64229-03
20	1/4" USS WASHER	17	64163-55
21	1/4-20 Nylon Insert Nut	10	64229-01
22	1/4-20 X 1" G5	2	64123-27
23	Detent Pin 3/8" x 1 5/8 EL	1	4163115
24	1/4"-20 x 3" OL Eyebolt	2	4163116
25	TUBE, DFS HANDLE	1	4163117
26	DFS WELDED LEVER ASSY.	1	4163098
27	5/16" Flat Washer	9	64163-55
28	5/16-18 Nylon Insert Nut	6	64229-02
29	Rubber Stopper 5/16-18 Thread	1	4163118
30	CS 1/4-20 X 2 G5	1	64123-60
31	CS 5/16-18 X 1 1/4 G5	2	64123-47
32	Rubber Grip 1" Pipe	1	4163097
33	Rubber Grip 1" x 1/4" x 4 1/4 Lg.	1	PL5029
34	1/16" CABLE	1	4163099
35	CABLE HOUSING	1	4163100
36	CABLE CRIMP, 1/16"	2	4163417
37	1/16" CABLE TIP	2	4163148
38	FERRULES FOR CABLE 5 mm HOUSING	2	4163148
39	3/4" HOLE PLUG, PLASTIC	8	4163119
40	3-BAG DFS MANUAL FABRIC	1	4163120
41	PLASTIC FLANGE BUSHING, 1/2" ID x 5/8" OD	12	4163121
42	1/4-20 SET SCREW	2	64044-1
43	SHOULDER BOLT .50 X .50	2	4163096

Dump from Seat Installation

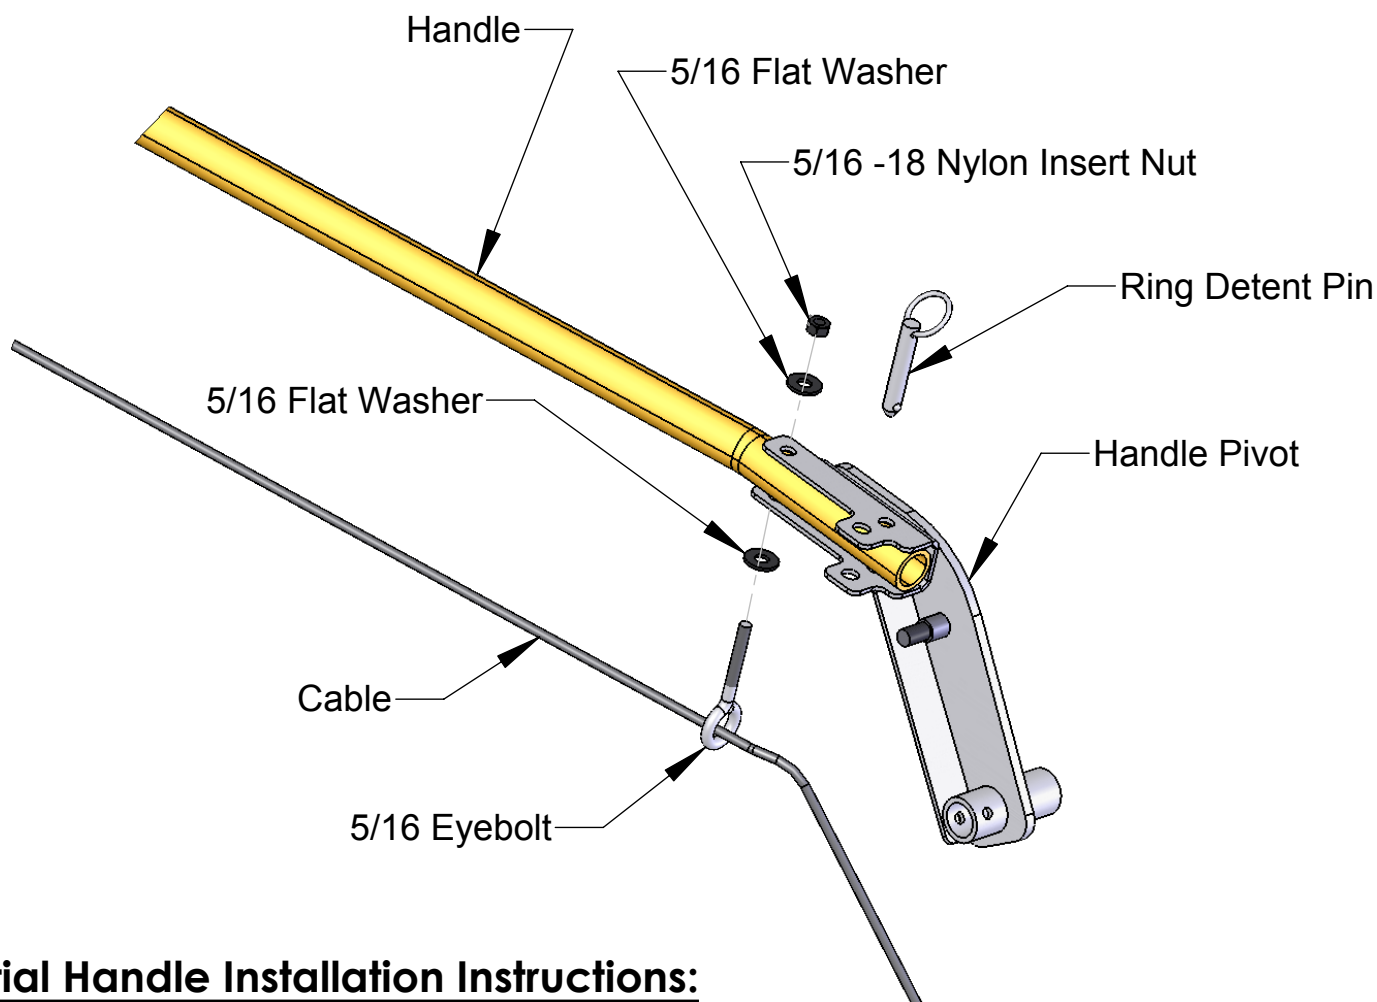

Initial Handle Installation Instructions:

1. Remove Ring Detent Pin from Handle Pivot.
2. Remove Nylon Insert Nut and 5/16" Flat Washer from Eyebolt.
3. Place Handle into Handle Pivot as shown.
4. Insert Eyebolt with washer through Handle Pivot and Handle.
5. Install 5/16 Flat Washer and Nylon Insert Nut.
6. Tighten Nylon Insert Nut to snug allowing the handle to pivot on the Eyebolt.
7. Insert Ring Detent Pin to prevent Handle from rotating towards the unit.

Dump From Seat Installation Instructions:

1. Open catcher top and remove grass bags.
2. Unfold handle and secure with Ring Detent Pin.
3. Insert Dump from Seat into catcher.
4. Close lid of catcher.
5. Engage Travel Lock Pin to secure catcher top.

Handle Storage Instructions:

1. Remove Ring Detent Pin from Handle Pivot.
2. Fold Handle towards front of unit.
3. Replace Ring Detent Pin.