

INTRODUCTION: This instruction sheet covers the installation the belt guide kit for the 48" and 52" FastCat cutterdecks.

- 1. Remove tension in cutterdeck belt **8**.
- 2. Disassemble idler assembly by removing bolt **1**.
- 3. Remove and discard two washers **7**.
- 4. Reassemble idler by replacing washers **7** with belt guide **4**.
- 5. Position belt guide **4** parallel to rear of cutterdeck as shown in figure **2**.
- 6. Re-tighten bolt **1**.
- 7. Re-tension cutterdeck belt **8**.

FIGURE 1


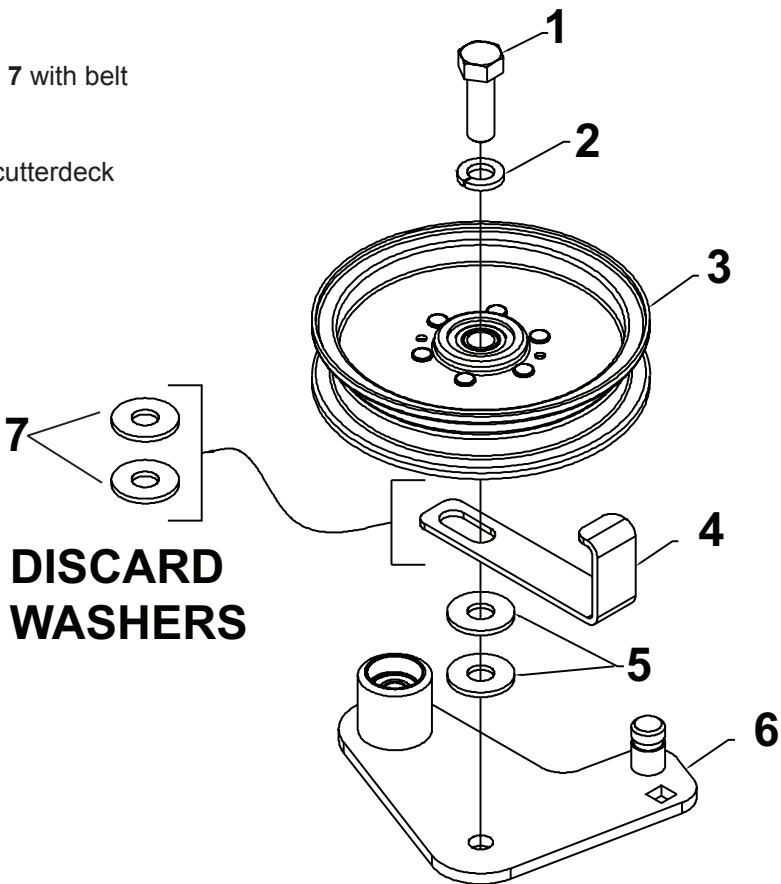


FIGURE 2

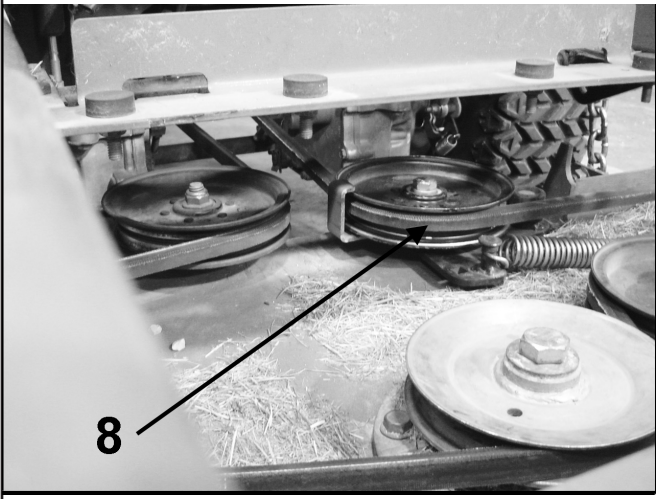

SERVICE PARTS LIST			
ITEM	PART NO.	DESCRIPTION	QTY
1	4163514.7	BELT GUIDE	1