

Service Bulletin

Date: 4/14/2008

Product Type: 48" & 52" Full size Zero Turn Units

Bulletin No: JC-008-08

970366 Heavy Duty PTO Idler for 48" & 52"

ISSUE: Final release in campaign to improve rear deck idler. See bulletins JC-001-08 and JC-005-08 for other related releases pertaining to this issue.

CORRECTION: Any 48" or 52" full size ZT unit that has a current or future warrantable failure of the idler post and/or idler arm on the rear of the deck will require the kit 970366 to be installed. NOTE: Production will begin implementing this new generation idler assembly as an in-line production change commencing 12-14-2007.

ACTION REQUIRED: This does NOT affect all units and is NOT a recall. If a customer experiences a problem with the current idler **during the warranty period**, then installation of the kit is applicable.

PARTS INVOLVED: Kit 970366 – Instructions and component parts list attached.
Note: This completes the release of kits to accommodate all cut sizes.

RECAP- Previously releases - 61" kit is 970367..... 72" kit is 970368

PRODUCTS INVOLVED: 48" & 52" Full Size BOB-CAT & BUNTON Zero Turns.

WARRANTY: 2 hours per unit/kit **ONLY on as need basis.**

If you have any questions please contact Commercial Grounds Care, Inc.
Customer Service Department @ 920-699-2000

This bulletin is relevant to the departments shown below. Please circulate as appropriate.

SERVICE ☒

WARRANTY ☒

SALES ☒

PARTS ☒



INTRODUCTION: This instruction sheet covers the installation of the 48" and 52" PTO idler kit (970366) for the 48" and 52" cutterdeck.

TOOLS REQUIRED:

- Drill
- 13/32" Drill Bit
- Center Punch
- Tape Measure or Ruler
- Blocks (for deck support)
- Ratchet w/ extension
- 9/16" Socket
- 9/16" Wrench
- Die Grinder
- Angle Grinder
- Red Loctite

Note: All references to "right" or "left" are with respect to an operator at the controls.


NOTE: Park the machine on a smooth, level surface. Raise the cutterdeck to the transport position and remove the height of cut pin. Lower the cutterdeck onto a set of equal height blocks. Remove cutterdeck from the machine.

ASSEMBLY INSTRUCTIONS:


1. Use the die grinder to remove welded on PTO idler pin and clean up all material down to cutterdeck top.
2. Locate new pin weldment as shown in **Figure 1**, mark and drill three 13/32" holes as indicated.
3. Install new idler pin weldment **(7)** using 3/8-16 nuts **(8)** and bolts **(6)**.
4. Slide inner rings **(5)** onto idler pin **(7)**. Inner rings may be a press fit onto pin
Place a drop of red Loctite in threaded hole in pin **(7)**.
5. Place spacer **(4)** on top of inner rings **(5)**.
6. Install idler arm weldment **(3)** onto pin **(7)**.
7. Place a drop of red loctite onto bolt **(2)** and fasten down idler arm weldment **(3)** to idler pin **(7)**
Torque Bolt **(2)** to 60 ft-lbs.
8. Install cap **(1)** then grease the assembly.
9. Remove pulleys from current idler arm weldment and install them on new idler arm weldment.
10. Reinstall cutterdeck on machine.

FIGURE 1

48" CUTTERDECK

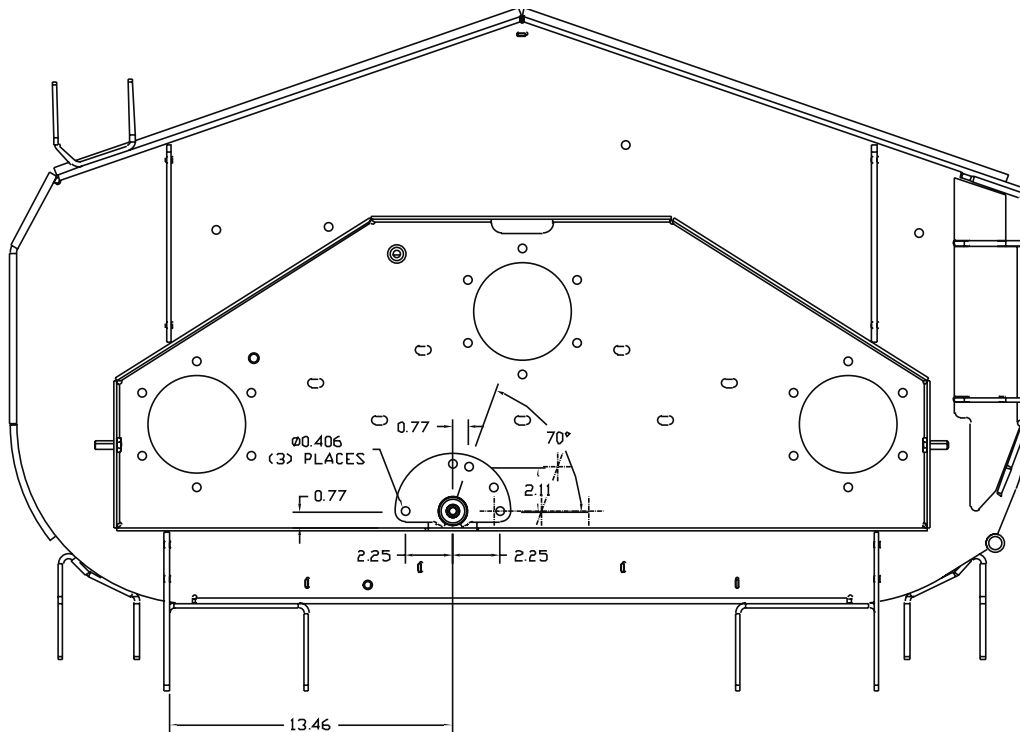

52" CUTTERDECK

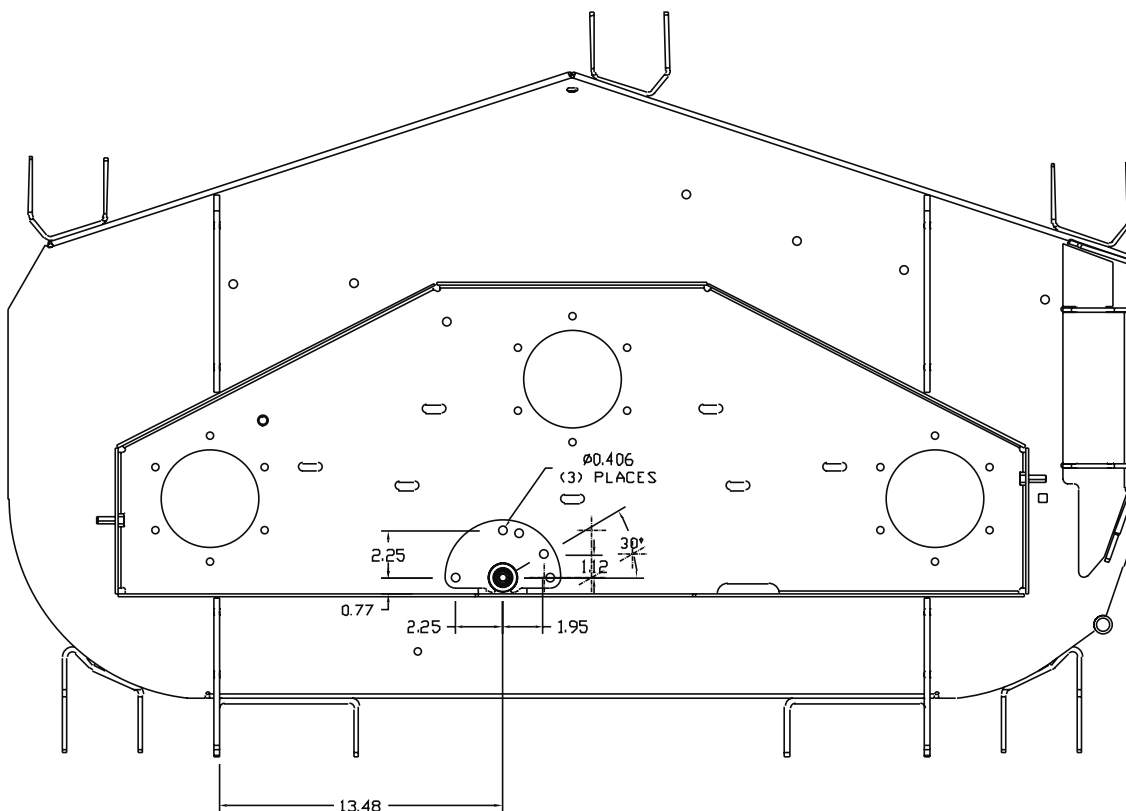

SERVICE PARTS LIST

ITEM	PART NO.	DESCRIPTION	QTY
1	4128002	CAP-END, 26 X 7	1
2	64270-02	BOLT-M10-1.5 X 30 ISO CL 10.9	1
3	4163028	WLDMNT-IDLER ARM	1
4	4163014	SPACER	1
5	4163155	INNER RING	2
6	64123-16	BOLT-3/8-16X1	3
7	4163251.7	WLDMNT-IDLER PIN	1
8	64229-03	NUT-3/8-16 NYLON LOCK	3

