

Original Language Instructions MAN 4164755 Rev. A 01-2010



LAWNAIRE V 6HP BRIGGS & STRATTON

LAWNAIRE V 4HP HONDA

744911C

CALIFORNIA

Proposition 65 Warning

Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects and other reproductive harm.

Californie Proposition 65 Avertissement

Les échappements des moteurs diesel et certains de leurs composés sont reconnus par l'Etat de Californie pour être cancérigènes, provoquer des défauts congénitaux et d'autres dangers en matière de reproduction.

A WARNING

The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

▲ AVERTISSEMENT

L'émission du moteur de ce matériel contient des produits chimiques que l'Etat de Californie considère être cancérigènes, provoquer des défauts congénitaux et d'autres dangers en matière de reproduction.

California Advertencia de la Proposicion 65

El estado de California hace saber que los gases de escape de los motores diesel y algunos de sus componentes producen cáncer, defectos de nacimiento y otros daños en el proceso de reproducción humana.

ADVERTENCIA

El estado de California hace saber que los gases de escape de este producto contienen productos quÍmicos que producen cáncer, defectos de nacimiento y otros daños en el proceso de reproducción humana.

CALIFORNIA Proposition 65 Warning

Battery posts, terminals, wiring insulation, and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. **WASH HANDS AFTER HANDLING.**

IMPORTANT MESSAGE

Thank you for purchasing this Schiller Grounds Care, Inc.product. You have purchased a world class product, one of the best designed and built anywhere.

This machine comes with Operator's and Parts Manuals containing safety, operation, parts, maintenance and service information. The useful life and good service you receive from this machine depends to a large extent on how well you read and understand this manual. Treat your machine properly, lubricate and adjust it as instructed, and it will give you many years of reliable service.

Your safe use of this Schiller Grounds Care, Inc.product is one of our prime design objectives. Many safety features are built in, but we also rely on your good sense and care to achieve accident-free operation. For best protection, study the manual thoroughly. Learn the proper operation of all controls. Observe all safety precautions. Follow all instructions and warnings completely. Do not remove or defeat any safety features. Make sure those who operate this machine are as well informed and careful in its use as you are.

See a Schiller Grounds Care, Inc.dealer for any service or parts needed. Schiller Grounds Care, Inc.service ensures that you continue to receive the best results possible from Schiller Grounds Care, Inc.products. You can trust Schiller Grounds Care, Inc.replacement parts because they are manufactured with the same high precision and quality as the original parts.

Schiller Grounds Care, Inc.designs and builds its equipment to serve many years in a safe and productive manner. For longest life, use this machine only as directed in the manual, keep it in good repair and follow safety warnings and instructions. You'll always be glad you did.

Schiller Grounds Care, Inc. One Bob Cat Lane Johnson Creek, WI 53038-0469

TABLE OF CONTENTS

Lawnaire

FIGURES PAGE

NOTICE !!!

Unauthorized modifications may present **extreme** safety hazards to operators and bystanders and could also result in product damage.

Schiller Grounds Care, Inc. strongly warns against, rejects and disclaims any modifications, add-on accessories or product alterations that are not designed, developed, tested and approved by Schiller Grounds Care, Inc.'s Engineering Department. Any Schiller Grounds Care, Inc. product that is altered, modified or changed in any manner not specifically authorized after original manufacture–including the addition of "after-market" accessories or component parts not specifically approved by Schiller Grounds Care, Inc.–will result in the Schiller Grounds Care, Inc. Warranty being voided.

Any and all liability for personal injury and/or property damage caused by any unauthorized modifications, add-on accessories or products not approved by Schiller Grounds Care, Inc. will be considered the responsibility of the individual(s) or company designing and/or making such changes. Schiller Grounds Care, Inc. will vigorously pursue full indemnification and costs from any party responsible for such unauthorized post-manufacture modifications and/or accessories should personal injury and/or property damage result.



This symbol means: ATTENTION! BECOME ALERT!

Your safety and the safety of others is involved.

Signal word definitions:

The signal words below are used to identify levels of hazard seriousness. These words appear in this manual and on the safety labels attached to Schiller Grounds Care, Inc. machines. For your safety and the safety of others, read and follow the information given with these signal words and/or the symbol shown above.

DANGER indicates an imminently hazardous situation which, if not avoided, **WILL** result in death or serious injury.

A WARNING

WARNING indicates a potentially hazardous situation which, if not avoided, **COULD** result in death or serious injury.

CAUTION indicates a potentially hazardous situation which, if not avoided, **MAY** result in minor or moderate injury. It may also be used to alert against unsafe practices or property damage.

CAUTION

CAUTION used without the safety alert symbol indicates a potentially hazardous situation which, if not avoided, **MAY** result in property damage.



MODEL NUMBER: This number appears on sales literature, technical manuals and price lists.

SERIAL NUMBER: This number appears only on your mower. It contains the model number followed consecutively by the serial number. Use this number when ordering parts or seeking warranty information.

PREPARING FOR SAFE OPERATION

Operator preparation and training Read the Operation & Safety Manual

If an operator or mechanic cannot read, it is the owner's responsibility to explain this material to them. If any portion of



this material is unclear, contact your factory representative for clarification.

- Become familiar with the safe operation of the equipment, operator controls and safety signs. Know how to stop the engine and attachments quickly in an emergency. Do not operate or allow another person to operate this machine if there are any questions about safety.
- All operators and mechanics should be trained. The owner is responsible for training the users.
- Wear appropriate clothing, including long trousers and safety goggles or safety glasses with side shields when operating. Wear substantial footwear. Do not operate barefoot or wearing open sandals. Long hair, loose clothing or jewelry may get tangled in moving parts.
- Wear appropriate hearing protection.
- Never allow children, unskilled or improperly trained people to operate this equipment. Local regulations can restrict the age of the operator.
- Keep warning labels and this operator's manual legible and intact. Replacement labels and manuals are available from the factory
- Do not operate machine while under the influence of drugs or alcohol or any other condition of impairment.
- The owner/user can prevent and is responsible for accidents or injuries occurring to themselves, other people or property.

Site preparation and circumstances

- Evaluate the terrain to determine what accessories and attachments are needed to properly and safely perform the job. Only use accessories and attachments approved by the manufacturer.
- Clear the area to be aerated of objects such as rocks, toys, wire or other debris that may be picked up or thrown by the machine.
- Be sure the area is clear of pets and people, especially young children. Never assume they will remain where you last saw them. Stop the machine if any enter the area.
- Operate only in daylight or in good artificial light.

Machine preparation

- Check operator presence interlock system and brake operation. Adjust or have any problems repaired before using.
- Do not tamper with or defeat safety devices. Keep guards, shields and interlock safety devices in place and in proper working condition. They are for your protection.
- Keep all fasteners such as nuts, bolts and pins well secured.
- Visually inspect tines, tine bolts and the drum assembly for wear or damage. Replace worn or damaged tines and bolts.
- Verify that machine and attachments, if any, are in good operating condition.
- Do not engage tines until ready to aerate.

OPERATING SAFELY

In general

- Use extra care when loading or unloading the machine into a trailer or truck.
- Slow down and use caution when making turns and crossing roads and sidewalks. Stop tines if not aerating.
- Do not run the engine in an enclosed area where dangerous carbon monoxide fumes can collect.
- Stop operation if someone approaches.
- Keep all guards in place when operating.
- Do not turn sharply. Use extreme caution when pulling machine towards you.
- Use counter-weight(s) or wheel sheights when suggested int he operator's manual.
- Never leave a running machine unattended. Always release drive and stop engine before leaving the operator's position.

Starting

- Start only according to instructions in this manual or on the machine.
- Before attempting to start the engine, make sure:
 the traction clutch is disengaged.
- When starting the engine, make sure hands and feet are clear of the blades.
- Do not change engine governor settings or overspeed the engine. Operating the engine at excessive speed can increase the hazard of personal injury.

Interrupting operation

- Before leaving the operator's position:
- Park on level ground.
- Disengage the traction clutch.
- Shut off the engine.
- Raise the tine:
- when not aerating;
- for transport;
- when crossing surfaces other than grass.
- Disengage the traction clutch, stop the engine, :
- before refueling;
- Disengage the traction clutch, stop the engine, allow the tines to come to a complete stop, and disconnect the spark plug wire:
- before clearing blockages;
- before checking, cleaning or working on the machine;
- beforehaving maintenance or repairs performed;
- after striking a foreign object. Inspect the machine for damage and have repairs made before restarting;
- if the machine begins to vibrate abnormally: shut off machine immediately. Inspect and have repairs made as needed before restarting;
- except for repairs or adjustments as specifically noted, such as for carburetor adjustment, where the engine must be running. Keep hands and feet clear of moving parts in these circumstances.
- Reduce the throttle setting during engine shutdown and, if the engine is provided with a shutoff valve, turn the fuel off at the conclusion of operation.

MANEUVERING SAFELY

In general

- Slow down before turning.
- Be aware when approaching blind corners, shrubs, trees, tall grass or other objects that may obscure vision.



Slope Operation

- Slopes are a major factor in loss-of-control and tipover accidents that sometimes lead to severe injury or death. All slopes require extra caution.
- Before operating on slopes, evaluate the risks involved.
- Do not operate on slopes if uneasy or uncertain. Ultimate responsibility for safe operation on slopes rests with the operator.
- Do not operate steep slopes.

A slope is too steep if:

- The machine must be crabbed (turned partially sideways uphill) to drive across the slope.

- The machine turns downhill going across the slope.

- You are uneasy about being on the slope
- With walk behind machines, operate across slopes, not up and down.
- Avoid starting or stopping on a slope. If wheels lose traction, disengage the traction clutch and proceed slowly straight down the slope.
- Keep all movement on the slopes slow and gradual. Do not make sudden changes in speed or direction.
- Do not turn on slopes unless necessary, and then turn slowly and downhill when possible.
- Do not operate near dropoffs, ditches or embankments. The machine could suddenly turn over if a wheel runs over the edge or an edge caves in.
- Follow the manufacturer's recommendations for wheel weights or counterweights to improve stability.

MAINTENANCE AND STORAGE SAFETY

In general

- Maintain machine according to manufacturer's schedule and instructions for maximum safety and best results.
- Park machine on level ground.
- Never allow untrained personnel to service machine.
- Guards should only be reoved by a qualified technician for maintenance or service. Replace when work is complete.
- Adjust or repair only after the engine has been stopped and the tines have quit rotating.
- Replace parts if worn, damaged or faulty. For best results, always replace with parts recommended by the manufacturer.
- Disconnect spark plug wire(s) before making any repairs.
- Do not dismantle the machine without releasing or restraining forces which may cause parts to move suddenly.
- Provide adequate support, e.g. jackstands for lifted machine or parts if working beneath.
- Do not put hands or feet near or under rotating parts.
- Clean up spilled oil or fuel thoroughly.
- Replace faulty mufflers.
- To reduce fire hazards, keep the engine, muffler, and fuel storage area free of grass, leaves, debris buildup or grease.

Tines

 Tines are shap and can cut. Use extra caution when handling. Wear appropriate personal protective equipment.



Only replace tines. Never straighten or weld them.

- Keep other persons away from tines.



Fuel

- Petrol (Ggasoline) and diesel fuels are flammable; petrol (gasoline) vapors are explosive. Use extra care when handling.
- Store only in containers specifically designed for fuel.
- When refueling or checking fuel level:
 - Stop the engine and allow to cool;
 - Do not smoke;
 - Refuel outdoors only;
 - Use a funnel;
 - Do not overfill;
 - If fuel is spilled, do not attempt to start the engine until the spill is cleaned up and vapors have cleared.
 - Replace caps on fuel containers and tanks securely.

Sparks from static electricity can start fires or cause explosions. Flowing fuel can generate static electricity. To prevent static electricity sparks:

- Keep fuel containers electrically grouded.
- Do not fill containers in a vehicle or on a truck or trailer bed with a plastic liner. Fill containers on the ground away from the vehicle.
- When practical, remove gas powered equipment from the truck or trailer and refuel it on the ground. If equipment must be refueled on the truck or trailer, refuel from a portable container rather than a dispenser nozzle.
- Keep the dispenser nozzle in contact with the rim of the fuel tank or container opening until fueling is complete. Do not use a nozzle lock-open device.

Storage

_

- Stop the engine and allow to cool before storing
- Drain the fuel tank outdoors only.
- Store fuel in an approved container in a cool, dry place
- Keep the machine and fuel containers in a locked storage place to prevent tampering and to keep children from playing with them.
- Do not store the machine or fuel container near appliances with an open flame such as a water heater or other appliance with a pilot light.
- Keep petrol (gasoline) storage area free of grass, leaves and excessive grease to reduce fire hazard.
- Clean grass and debris from cutting units, drives, mufflers and engine to help prevent fires.



EC Conformity - Conforms to all EC Directives applicable.

Lawnaire IV & V






Throttle Control

-Move the throttle lever forward for increased engine speed.

-Pull the throttle lever backwards for slower engine speeds.

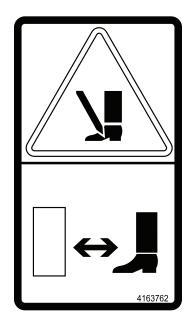


-Keep feet clear of tines.

-Tines can pierce or crush.

SAFETY AND OPERATION LABELS



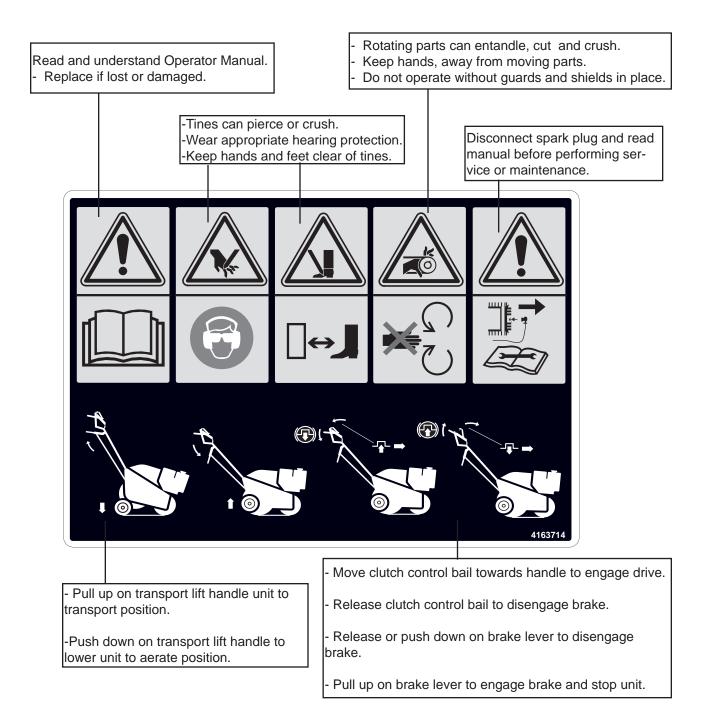

HANDLE CONTROLS

Transport Lift Handle C - Pushing down on the handle lowers the tines for aerating. Pulling the handle up raises the tines so the aerator can be moved or transported without incurring damage to the unit or the turf.


Clutch Control Handle (Bail) D - Engages the belt tightener clutch. Raise interlock latch **B**, then pulling back on the handle engages the clutch; releasing the handle disengages the clutch.

A WARNING

Releasing the clutch on an incline will allow the unit to roll down the incline.

Throttle Control A - The throttle control, located on the handle, adjusts the engine speed. Pushing the control forward increases the speed; pulling the control back reduces the speed.

Brake Lever E - Pulling the brake lever up engages the brake on the drive system, and stops the unit. (Note: the clutch control handle (bail) D must be released before engaging the brake.) Releasing the brake lever disengages the brake.

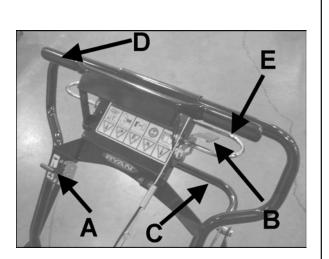



ENGINE CONTROLS

The Lawnaire IV & V are available with either a Briggs & Stratton engine or a Honda engine.

Briggs & Stratton Engine Controls


The engine is equipped with an On/Off control **A**, a choke control **B** and fuel shut-off valve **C**. The fuel valve and On/Off control must both be in the "ON" position for the engine to be started. Turning the On/Off control to the "OFF" position will stop the engine. Using the choke control will help start a cold engine. After the engine starts, adjust the choke for best running results. Once the engine warms up, the choke should not be needed.

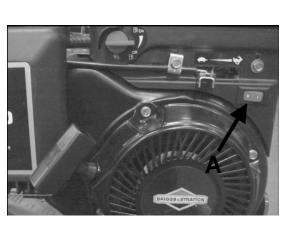

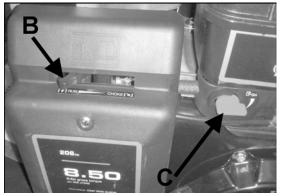

Honda Engine Controls

The engine is equipped with a choke A, a fuel valve **B** and an On/Off switch **C**. The fuel valve and the On/Off switch must both be in the "ON" position to start the engine. Turn the On/Off switch to "OFF" to stop the engine. Using the choke will help start a cold engine. After the engine starts, adjust the choke for best running results. Once the engine warms, the choke should not be needed.

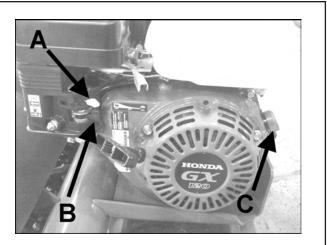


PRE-OPERATION CHECK LIST (OPERATOR'S RESPONSIBILITY)

- ____ Review and follow all safety rules and safety decal instructions.
- ____ Check that all safety decals are installed and in good condition. Replace if damaged.
- ____ Check to make sure all shields and guards are properly installed and in good condition.
- ____ Check that all hardware is properly installed. and secured.
- Check to be sure engine is free of dirt and debris. Pay particular attention to the cooling fins, governor parts and muffler. Clean air intake screen. Check air cleaner; service if necessary.
- Inspect area and remove stones, branches or other hard objects that might be thrown, causing injury or damage.
- Clean area around oil fill dipstick. Remove dipstick and check to be sure oil is in operating range (between marks on dipstick). Add oil if necessary but **Do Not Overfill**. Install dipstick assembly firmly until cap bottoms out on tube. Dipstick assembly must always be secured into fill tube when engine is running.
- ____ Check all lubrication points and grease as instructed in manual.

FUELING

- Fill fuel tank with good quality, clean, unleaded regularpetrol (gasoline). Do not use hi-test fuel.
- Use a funnel to avoid spilling.

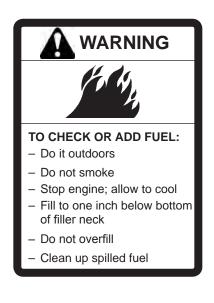

BEFORE STARTING THE ENGINE

- Be familiar with all controls, how each functions and what each operates.
- Check the oil with the engine level and add if necessary. Open the fuel valve.
- **Choke**: For cold starts, set the throttle lever to the half-open position and pull the choke out to the ON position. For warm starts set the throttle to the half-open position and the choke to the OFF position.

AERATING

NOTE: For best performance and maximum tine penetration, the lawn should be thoroughly watered the day before aeration.


- Rotate the water drum on the front of the unit until the filler plug F is positioned at the top. Remove the plug, fill the drum with water and replace the plug.
- Move the engine On/Off switch to the "ON" position and then pull the recoil starter and choke as required to start the engine.
- 3. Lift the transport lift handle if necessary to make sure the tines are not touching the ground, advance the throttle, slowly pull back on the clutch handle control and transport the aerator to the work area.

NOTE: Never cross hard objects or surfaces (such as sidewalks, driveways, stepping stones, etc.) with tines in the down position.

- 4. Upon reaching the work area, release the clutch control handle and adjust the throttle speed for aerating.
- 5. Push down on the transport lift handle, lowering the aerating tines to the turf.
- 6. Pull back slowly on the clutch control handle to start aerating.

NOTE: For maximum tine penetration into turf, apply downward pressure on the handle, until drum is off the ground.

- 7. At the end of each aerating pass, release the clutch control handle, lift up on the handle assembly and pivot the unit on the water drum. Resume aerating.
- 8. When finished aerating, lift up on the transport lift handle to move the unit into transport position.
- 9. Drain the water drum when finished with aerating.

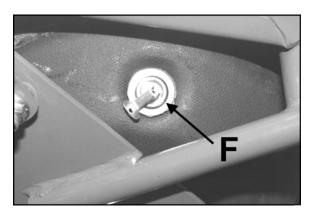

MAINTENANCE

AWARNING

Tines:

- Replace damaged or broken tines.
- Do not weld or straighten tines.
- Clean tines after use, inside and out.
- Apply a light coat of oil to tines to prevent rust.

Engine:

- With the engine in a level position check oil levels in the engine and gear reduction case. Add if required. (See engine operation manual for details.)

Lubrication:

- Grease the idler pivot and wheel bearings at the start of the season and every 25 hours.

- Keep roller chain clean and in proper running order. Lubricate with Lubriplate #13563 or equivalent at start of the season and every 25 hours.

ADJUSTMENTS

WARNING

Clutch Adjustments:

• The clutch cable spring should be extended 1/8" - 1/4" (3 - 6mm) when the clutch is engaged.


TO ADJUST: Loosen the nut E at the clutch cable mounting point on the clutch control handle. Adjust the position as needed.

Chain:

 The roller chain should have 1/8" - 1/4" (3 - 6mm) deflection at the center point between the upper idler and water drum sprockets.

TO ADJUST: Loosen the mounting bolt on one of the movable idler sprockets and slide in its slot until the desired tension is reached. Tighten the bolt. Note there are two (2) movable sprockets. If one does not provide sufficient take-up, use the other.

NOTE: Do not over tighten the chain. Excessive chain tension will reduce chain and bearing life. It can also lead to fatigue failure of the frame.

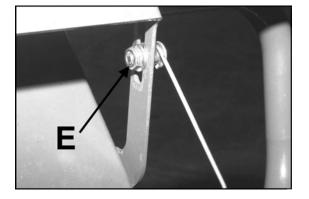

TRANSPORTING

Removing the cast weights and draining the water drum will decrease the weight for easier loading on a vehicle or trailer.

If the Ryan tote trailer will be used to transport the unit, the two cast weights must be removed from the aerator frame and a locking shaft installed in their place.


To remove the weights, pull up on the latch **A** securing the weights **B** and slide the weights out.

Use caution when removing the cast weights. Each weight is approximately 22 lbs.


NOTE: Close the fuel shut off valve before transporting the unit.

When manually transporting the machine for short distances:

- Pull up on the transport lift handle so that the tines are raised.
- Pull back on the clutch control handle (bail) to engage the drive. The water drum will propel the machine forward.

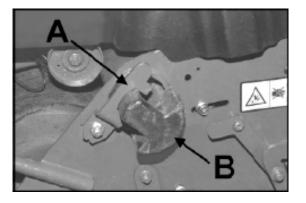

Lawnaire

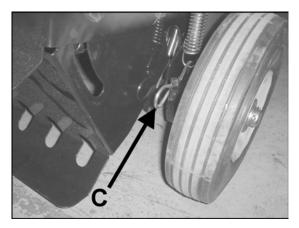

REMOVABLE TRANSPORT WHEELS

The rear wheels of the Lawnaire V are removable for transporting the aerator through fence gates.

With the wheels removed the Lawnaire V will pass through a 32 inch opening.

With the engine off, lower the aerator so that the tines are on the ground and the wheels are off the ground. Remove hair pins C from the axles. Slide wheels and axles out of transport frame.

Lift up on the aerator handle so the tines are off the ground. With the tines off the ground, push the aerator through the gate on the front drum. Once on the other side of the gate, reinstall the wheels.

STORAGE INSTRUCTIONS

AWARNING

To prevent possible explosion or ignition of vaporized fuel, do not store equipment with fuel in tank or carburetor in an enclosure with open flame (for example, a furnace or water heater pilot light).

Before the equipment is put in to storage for any period exceeding 30 days, the following steps should be taken.

- 1. Drain all fuel from the fuel tank and fuel lines.
- 2. Start the engine and run until all the fuel is used from the carburetor float bowl.
- While the engine is still warm, drain the crankcase oil and refill with the proper weight oil corresponding to the season the equipment will next be used.
- 4. Remove the spark plug and squirt a small amount of engine oil into the cylinder. Turn the engine over a few times to distribute the oil.
- 5. Drain the water drum.

NOTE: Always drain the water drum for winter storage. Freezing water can rupture the drum.

- 6. Grease the clutch pivot fitting and wheel bearings.
- 6. Lubricate the chain.

To put the equipment into service after an extended period of storage:

- 1. Check for loose parts and tighten if necessary.
- 2. Check for cracked or broken tines and replace as necessary.
- 3. Fill the fuel tank with clean, fresh fuel.
- 4. Check the engine and gear reduction case oil levels with the engine in a level position.
- 5. Start the engine.
- 6. Check for fuel leaks.
- 7. Check clutch control operation to make sure the unit stops when the clutch control is released.

LAWNAIRE IV	LAWNAIRE V		
Dimensions:	Dimensions:		
Width	Width		
Length	Length		
Length (handle folded) 46" (1168 mm)	Length (handle folded) 46" (1168 mm)		
Height (transport) 47.5" (1206 mm)	Height (transport) 47.5" (1206 mm)		
Height (handle folded) 30" (762 mm)			
	Net Weight:		
Net Weight:	Dry, w/o acc. weight 270 lbs. (122 Kg)		
Dry, w/o acc. weight 240 lbs. (109 Kg)	Dry, w/ acc. weight 309 lbs. (140 Kg)		
Dry, w/ acc. weight 279 lbs. (126 Kg)	With water tank full		
With water tank full	and acc. weight 330 lbs. (1497 Kg)		
and acc. weight 280 lbs. (127 Kg)			
Grand	Speed:		
Speed:	Transport up to 320 f.p.m. (97.5 M.p.m.)		
Transport up to 320 f.p.m. (97.5 M.p.m.)	Aerate up to 305 f.p.m. (93 M.p.m.)		
Aerate up to 305 f.p.m. (93 M.p.m.)	Deltas		
Drive:	Drive:		
Primary V Belt, 4L section	Primary V Belt, 4L section		
Secondary	Secondary #40 plated roller chain		
	Wheels:		
Wheels:	Front 11" (279 mm) Dia. water tank		
Front 11" (279 mm) Dia. water tank	7.9 gal. (29.9 L) max. capacity		
5.2 gal. (19.7 L) max. capacity	Rear 8 x 2.50 semi-pneumatic tires		
Rear	with 3/4" ball bearings		
with 3/4" ball bearings	Aeration:		
Aeration:	Tines 3/4" (19 mm) formed from .08" hardened		
Tines 3/4" (19 mm) formed from .08" hardened			
chrome molybdenum alloy steel, 30 per unit			
Penetration Depth 2 3/4" (70 mm) max.	Swath Width 26 1/2" (673 mm)		
Swath Width 19" (483 mm)	Hole Pattern 3 3/4" x 7" (95 x 178 mm) on center		
Hole Pattern 3 3/4" x 7" (95 x 178 mm) on center	Production Up to 40,400 sq. ft. / hour		
Production Up to 28,975 sq. ft. / hour			
Engines:			
Model 744908B & 744910B			
ModelHONDA GX120K1HX	4 cycle 7.2 cu.in. (118 cc)*3.5 HP (2.6 KW)		
StarterRecoil, on/off switch			
Governor			
Idle Speed1400 + 100 RPM			
Fuel Tank3.4 qt. (3.2 L)Gear Reduction6 to 1			
Model 744909C & 744911C			
	Stratton 4 cycle12.5 cu.in. (206cc)*6.0HP (4.5KW)		
StarterRecoil, on/off switch			
Governor			
Idle Speed			
Fuel Tank			
Gear Reduction6 to 1			
* as tested by manufacturer @ 3600 R.P.M.			

EC Declaration of Conformity

4164757REV A

k Chuck Clark

Director of Operations Date: February 23, 2010

Anton

Jim White Managing Director Date: February 23, 2010

EU Authorized Representative: Earlsmere Limited Unit 18 Valley Road Station Road Industrial Estate Wombwell, Barnsley, South Yorkshire S73 OBS UK

Declare that the machine(s) described below:

Schiller Grounds Care, Inc.

Johnson Creek, WI 53038

The Undersigned Manufacturer:

One Bob-Cat Lane

Make & Type:	Ryan, Lawnaire IV, V
Category:	
Series:	744909C, 744911C
Engine:	Briggs & Stratton
Туре:	127352
Speed:	3200 R.P.M
Net Installed Power:	4.5 KW (6.0hp)
Operation Width:	483 mm (19") for 744909C
	673mm (26.5") for 744911C

Complies with the provision of the following European Directives, Amendments, and the Regulations transposing it into national law:

Directives/Harmonized Standards

Machinery Directive	2006/42/EC
EMC Directive:	2004/108/EC
Noise in the Environment Directive	2000/14/EC
Vibration Directive	2002/44/EC
Pedestrian controlled aerators and scarifiers	EN13684
Non Road Emissions	2002/88/EC

Sound:

Vibration:

Intended Use:

This machine is for Aerating sod, turf or grassy areas. It is intended for use on flat areas and small slopes. Loss of control may result on steeper slopes. It is not intended for use in rocky areas.

EC Declaration of Conformity

4164758 REV A

The Undersigned Manufacturer: Schiller Grounds Care, Inc. One Bob-Cat Lane Johnson Creek, WI 53038

EU Authorized Representative: Earlsmere Limited Unit 18 Valley Road Station Road Industrial Estate Wombwell, Barnsley, South Yorkshire S73 OBS UK

Chuck Clark Director of Operations Date: February 23, 2010

Jim White Managing Director Date: February 23, 2010

Declare that the machine(s) described below:

Make & Type:	Ryan, Lawnaire IV, V
Category:	Aerator
Series:	744908B, 744910B
Engine:	Honda
Type:	GX120UT1
Speed:	3200 R.P.M
Net Installed Power:	3.0 KW (4.0hp)
Operation Width:	

Complies with the provisions of the following European Directives, Amendments, and the Regulations transposing it into national law:

Directives/Harmonized Standards

Machinery Directive	2006/42/EC
EMC Directive:	
Noise in the Environment Directive	2000/14/EC
Vibration Directive	2002/44/EC
Pedestrian controlled aerators and scarifiers	EN13684
Non Road Emissions	2002/88/EC

Vibration:

10.8 m/s² Model 744908

Intended Use:

This machine is for aerating sod, turf, or grassy areas. It is intended for use on flat areas and small slopes. Loss of control may result on steeper slopes. It is not intended for use in rocky areas.

SCHILLER GROUNDS CARE, INC. ONE BOB-CAT LANE P.O. BOX 469 JOHNSON CREEK, WI 53038 920-699-2000 www.schillergc.com



BOB-CAT BUNTON RYAN STEINER